
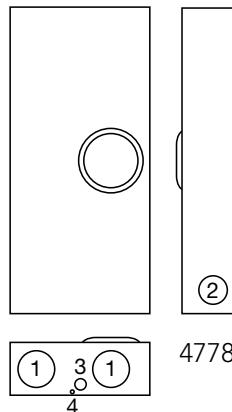


# Single Position Lever Bypass

320 Amps | 4 Terminals | Ringless | 600 VAC

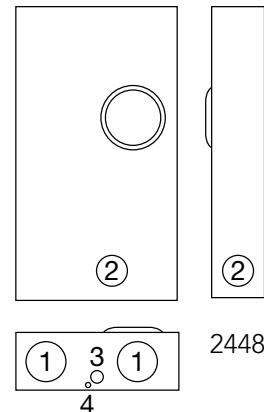

U2448-X

U4778-X-BL

320 Amps | 4 Terminals | Ringless | Single Position | 1Ø3W

Catalog Number	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U2448-X	OH/UG	C.P.	3/8" x 16 Studs	Lever	6 1/2	17 3/4	34 1/8	4	3	1	1/4
U4778-X-BL	OH/UG	C.P.	3/8" x 16 Studs	Lever	6 1/2	17 3/4	38 3/4	4	3	1	1/4

## Notes

- Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- Bypass:** The lever supplies clamping action on meter spades and also operates bypass device.
- Connectors:** Units are supplied with 3/8" x 16 hex nuts with Belleville washers. Order **K1540** (single 600 kcmil) or **K1350** (twin 350 kcmil). Order two kits to cover both line and load.
- Fifth Terminal:** For field-installable fifth terminal, order **K3865** as extra.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.