

M12™ FORCE LOGIC™ Press Tool Kit

2473-22 (2473-20 No Jaw Kit)

Specifications:

Capacity	1/2" – 1-1/4" CU
Calibration Interval	32,000 Cycles (LED Indicator)
Approximate Cycle Time	5 Seconds
Press Force	5,400 lbs
Length / Weight	12.8" / 3.8 lbs



Includes: 2473-22 (3) Jaws (1/2", 3/4", 1");
2473-20 (No Jaws Included);
All Kits Include: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Charger, Carrying Case

Related Accessories:
49-16-2450 1/2" CTS Jaw;
49-16-2451 3/4" CTS Jaw;
49-16-2452 1" CTS Jaw;
49-16-2453 1-1/4" CTS Jaw;
49-16-2450B 1/2" IPS Jaw;
49-16-2451B 3/4" IPS Jaw;
49-16-2451C 1/2" PEX Crimp (F1807 & F2159) Jaw;
49-16-2453C 3/4" PEX Crimp (F1807 & F2159) Jaw;
49-16-2454C 1" PEX Crimp (F1807 & F2159) Jaw;
49-16-2455C 1-1/4" PEX Crimp (F1807) Jaw;
49-16-2456C 1-1/2" PEX Crimp (F1807) Jaw

M12™ M-SPECTOR FLEX™ 3 ft Inspection Camera Cable w/ PIVOTVIEW™ Kit

2317-21

Specifications:

Screen Size	3.5" High-Resolution LCD
Camera Resolution	640 x 480
Camera Head Diameter	12.5 mm (0.49")
Head Movement	Up to 270° PIVOTVIEW™ Camera
Cable Length	3 ft
Wireless Distance	Up to 15 ft



Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case

M12™ M-SPECTOR FLEX™ 9 ft Inspection Camera Cable Kit

2316-21

Specifications:

Screen Size	3.5" High-Resolution LCD
Camera Resolution	640 x 480
Camera Head Diameter	12.5 mm (0.49")
Cable Length	9 ft
Wireless Distance	Up to 15 ft



Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case

M12™ M-SPECTOR FLEX™ 3 ft Inspection Camera Cable Kit

2315-21

Specifications:

Screen Size	3.5" High-Resolution LCD
Camera Resolution	640 x 480
Camera Head Diameter	12.5 mm (0.49")
Cable Length	3 ft
Wireless Distance	Up to 15 ft



Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case



M12™ No-Hub Driver Kit

2455-22 (2455-20 Tool-Only)

Specifications:

Torque Settings (3-Mode)	60 in-lbs / 80 in-lbs / Drill
RPM	0 – 750
Chuck Type	1/4" Hex
Calibration Interval	25,000 Cycles (LED Indicator)
Weight	2.7 lbs



Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, (3) SHOCKWAVE™ Nut Drivers (1/4", 5/16", 3/8"), Charger, Carrying Case



M-SPECTOR FLEX™ Inspection Camera Accessories

Compatible with 2317-21, 2316-21, 2315-21

48-53-0155 M-SPECTOR FLEX™ 3 ft Inspection Camera Cable w/ PIVOTVIEW™;
48-53-0151 M-SPECTOR FLEX™ 9 ft Inspection Camera Cable;
48-53-0150 M-SPECTOR FLEX™ 3 ft Inspection Camera Cable



M12™ M-SPECTOR 360™ Rotating Inspection Scope Kit

2313-21 (2313-20 Tool-Only)

Specifications:

Screen Size	2.7" High-Resolution LCD
Display Resolution	320 x 240
Camera Head Diameter	9 mm (0.35")
Cable Length	3 ft
LED Brightness	4 LEDs, 5 Settings



Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Hook, Magnet, Mirror Attachments, Charger, Contractor Bag

M12™ M-SPECTOR 360™ 9 ft Rotating Inspection Scope Kit

2314-21

Specifications:

Screen Size	2.7" High-Resolution LCD
Display Resolution	320 x 240
Camera Head Diameter	9 mm (0.35")
Cable Length	9 ft
LED Brightness	4 LEDs, 5 Settings



Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Hook, Magnet, Mirror Attachments, Pipe Guide, Charger, Contractor Bag

M-SPECTOR 360™ Rotating Inspection Scope Accessories

Compatible with 2313-21, 2314-21

48-53-0112 3 Pc Accessory (Includes Hook, Magnet, Mirror Attachments);
48-53-0113 Pipe Guide Accessory



M12™ 102 x 77 Infrared Camera Kit


2258-21

Specifications:

Sensor Resolution	102 x 77 Pixels
Temperature Range	14°F – 626°F (-10°C – 330°C)
LCD Display	2.4" High Resolution
Color Palettes	Iron, Rainbow, Gray
Focus Method	Auto-Ranging
Image Storage & Reporting	Yes



Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, SD Card, USB Cable, Protective Boot, Charger, Carrying Case

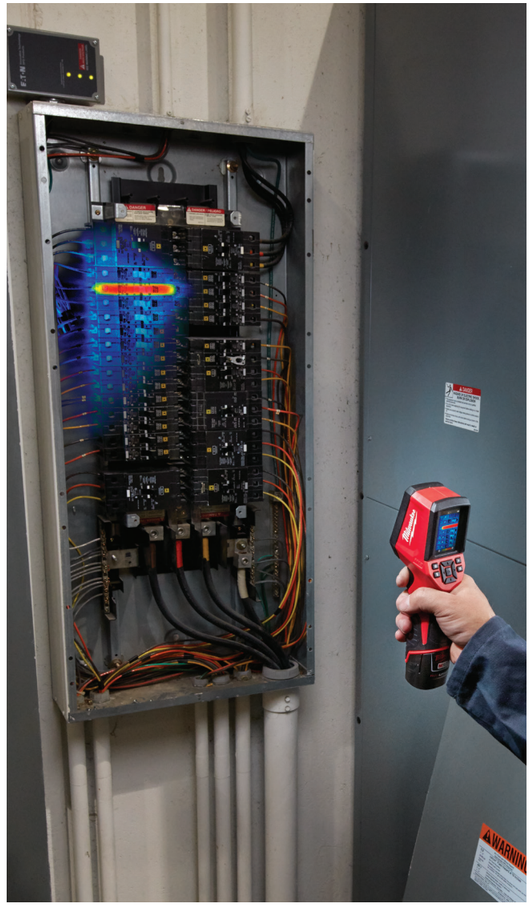

M12™ 12:1 Infrared TEMP-GUN™

2278-20 Tool-Only

Specifications:

Distance-to-Spot Ratio	12:1
Temperature Range	-22°F – 1,022°F (-30°C – 550°C)
Basic Accuracy	+/-1.8%
Max/Min/Avg/Dif	Yes
High/Low Alerts	Yes
Emissivity	Fixed, .95
Drop Test	6 ft



Battery and Charger Sold Separately