


HOSPITAL GRADE RECEPTACLES

Hospital Grade Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

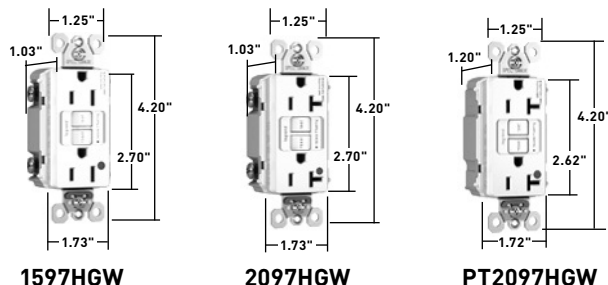

Features


- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.
- Two back-wire holes per terminal.
- Ground screw has a back-wire clamp for easy installation.

PlugTail Features


- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail Connectors creating a non-feed-thru application for facility owners.
- Zinc-plated steel mounting strap.

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trio Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	VAC			 UL943 C22.2 No. 144	 UL498 C22.2 No. 42	FSUL WC596
HOSPITAL GRADE 15 AMP DUPLEX GFCI								
1597HGI	PT1597HGW	15	125	Ivory	5-15R	•	•	•
1597HGW		15	125	White	5-15R	•	•	•
1597HGBK		15	125	Black	5-15R	•	•	•
1597HGGRY		15	125	Gray	5-15R	•	•	•
1597HGRED	PT1597HGRED	15	125	Red	5-15R	•	•	•
1597HGLA	PT1597HGLA	15	125	Light Almond	5-15R	•	•	•
HOSPITAL GRADE 20 AMP DUPLEX GFCI								
2097HGI	PT2097HGI	20	125	Ivory	5-20R	•	•	•
2097HGW	PT2097HGW	20	125	White	5-20R	•	•	•
2097HGB	PT2097HGB	20	125	Brown	5-20R	•	•	•
2097HGBK	PT2097HGBK	20	125	Black	5-20R	•	•	•
2097HGGRY	PT2097HGGRY	20	125	Gray	5-20R	•	•	•
2097HGRED	PT2097HGRED	20	125	Red	5-20R	•	•	•
2097HGLA	PT2097HGLA	20	125	Light Almond	5-20R	•	•	•

For PlugTail Connectors, see Page B-21.



NEMA 5-15R



NEMA 5-20R

GFCIs

Hospital Grade Self-Test GFCI Receptacles with SafeLock® Protection

2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Features


- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- External back-wire pressure plates

with posted terminal screws for faster installation.

- Redesigned side-wire cavity improves speed of side-wire installation.
- Posted terminal screws for faster side-wire installation.
- Ground screw has a back-wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.


PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting straps

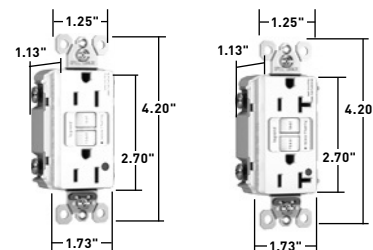

1597HGW

2097HGW

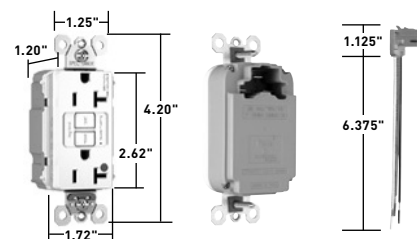

PT2097HGW

PTR6STR

Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA
- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	VAC			 UL943 C22.2 No. 144	 UL498 C22.2 No. 42	FSUL WC596
15 AMP DUPLEX GFCI								
1597HGI	PT1597HGW	15	125	Ivory	5-15R	•	•	•
1597HGW		15	125	White	5-15R	•	•	•
1597HGBK		15	125	Black	5-15R	•	•	•
1597HGGRY	PT1597HGGRY	15	125	Gray	5-15R	•	•	•
1597HGRED	PT1597HGRED	15	125	Red	5-15R	•	•	•
1597HGLA	PT1597HGLA	15	125	Light Almond	5-15R	•	•	•
20 AMP DUPLEX GFCI								
2097HGI	PT2097HGI	20	125	Ivory	5-20R	•	•	•
2097HGW	PT2097HGW	20	125	White	5-20R	•	•	•
2097HG	PT2097HG	20	125	Brown	5-20R	•	•	•
2097HGBK	PT2097HGBK	20	125	Black	5-20R	•	•	•
2097HGGRY	PT2097HGGRY	20	125	Gray	5-20R	•	•	•
2097HGRED	PT2097HGRED	20	125	Red	5-20R	•	•	•
2097HGLA	PT2097HGLA	20	125	Light Almond	5-20R	•	•	•

CATALOG NUMBER	WIRE TYPE	WIRE LENGTH
PLUGTAIL CONNECTORS - RIGHT ANGLE		
PTRA6STR	Stranded	6"
PTRA6SOL	Solid	6"

For additional PlugTail Connectors, see Page B-21.

All PlugTail Connectors are available in any wire length up to 25 inches, consult factory to order.



NEMA 5-15R



NEMA 5-20R



All devices listed on this page conform to NEMA WD-1 and WD-6.