



# HOSPITAL GRADE RECEPTACLES

## Hospital Grade Tamper-Resistant Self-Test GFCI Receptacles with SafeLock® Protection


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC



1597HGTRW



2097HGTRW



PT2097HGTRW

### Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).

- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.
- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- Side or internal screw-pressure-plate back wire with #10 - #14 AWG solid or stranded copper wire.

- Two back-wire holes per terminal.
- Ground screw has a back-wire clamp for easy installation.

### PlugTail Features

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.
- GFCI works with existing 3-wire PlugTail Connector creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC

- Trio Threshold:  $5 \pm 1\text{mA}$
- Trip Time: 0.025 sec., nominal per UL Standard

- 20 Amp feed-thru capacity

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	VAC			UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>HOSPITAL GRADE TAMPER-RESISTANT 15 AMP DUPLEX GFCI</b>								
1597HGTRI	PT1597HGTRI	15	125	Ivory	5-15R	•	•	•
1597HGTRW	PT1597HGTRW	15	125	White	5-15R	•	•	•
1597HGTR		15	125	Brown	5-15R	•	•	•
1597HGTRBK		15	125	Black	5-15R	•	•	•
1597HGTRGRY		15	125	Gray	5-15R	•	•	•
1597HGTRRED	PT1597HGTRRED	15	125	Red	5-15R	•	•	•
1597HGTRLA	PT1597HGTRLA	15	125	Light Almond	5-15R	•	•	•
<b>HOSPITAL GRADE TAMPER-RESISTANT 20 AMP DUPLEX GFCI</b>								
2097HGTRI	PT2097HGTRI	20	125	Ivory	5-20R	•	•	•
2097HGTRW	PT2097HGTRW	20	125	White	5-20R	•	•	•
2097HGTR		20	125	Brown	5-20R	•	•	•
2097HGTRBK	PT2097HGTRBK	20	125	Black	5-20R	•	•	•
2097HGTRGRY	PT2097HGTRGRY	20	125	Gray	5-20R	•	•	•
2097HGTRRED	PT2097HGTRRED	20	125	Red	5-20R	•	•	•
2097HGTRLA	PT2097HGTRLA	20	125	Light Almond	5-20R	•	•	•

For PlugTail Connectors, see Page B-21.

All devices listed on this page conform to NEMA WD-1 and WD-6.



NEMA 5-15R



NEMA 5-20R

# GFCIs

## Hospital Grade Tamper-Resistant Self-Test GFCI Receptacles with SafeLock® Protection 2 Pole, 3 Wire Grounding 15 & 20A, 125VAC


### Features

- Protects children: patented shutter system helps prevent improper insertion of foreign objects.
- Meets National Electrical Code® Tamper-Resistant requirements.
- Conducts an automatic test every three seconds, ensuring it's always ready to protect. If the device fails the test, the indicator light flashes to signal that the GFCI should be replaced. It also has our proven SafeLock® Protection feature: if critical components are damaged and protection is lost, power to the receptacle is disconnected.
- Auto-Ground Clip assures a positive ground to metal box.
- FSUL Listed (Federal Specification WC596).
- Mounting screws are shipped captive in the device and wall plate for easier installation.
- High-impact-resistant thermoplastic construction with tri-drive terminal screws.
- Trip indicator light (red LED).
- Supplied with matching TP26 nylon wall plate (except NI, DB, and G models).
- Feed-through wiring configuration allows GFCI to protect downstream receptacles.

- Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly.
- External back-wire pressure plates with posted terminal screws for faster installation.
- Redesigned side-wire cavity improves speed of side-wire installation.
- Posted terminal screws for faster side-wire installation.
- Ground screw has a back-wire clamp for easy installation.
- RoHS compliant.
- Proposition 65 compliant.
- Torque terminal screws to 14-16 inch-pounds.


### PlugTail® Models Only

- Faster, more reliable installation.
- No exposed terminals create a finger-safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections to PlugTail Connector.

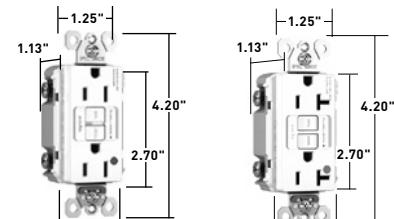

1597HGTRW

2097HGTRW

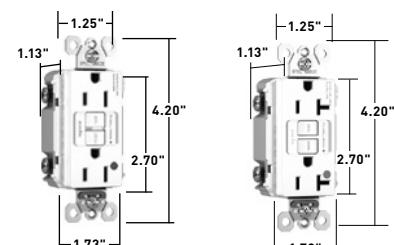

PT1597HGTRW


PT2097HGTRW

- GFCI works with the existing 3-wire PlugTail connectors creating a non-feed-through application for facility owners.
- Zinc-plated steel mounting strap.

### Specifications

- Supply Voltage: 125VAC, 60 Hz
- Supply Voltage Range: 102-132 VAC
- Trip Threshold: 5± 1mA

- Trip Time: 0.025 sec., nominal per UL Standard
- 20 Amp feed-thru capacity (non-PlugTail® models only)

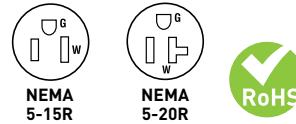

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	VAC			UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
<b>15 AMP DUPLEX GFCI</b>								
1597HGTRI	PT1597HGTRI	15	125	Ivory	5-15R	•	•	•
1597HGTRW	PT1597HGTRW	15	125	White	5-15R	•	•	•
1597HGTR		15	125	Brown	5-15R	•	•	•
1597HGTRBK		15	125	Black	5-15R	•	•	•
1597HGTRGRY		15	125	Gray	5-15R	•	•	•
1597HGTRRED	PT1597HGTRRED	15	125	Red	5-15R	•	•	•
1597HGTRLA	PT1597HGTRLA	15	125	Light Almond	5-15R	•	•	•
<b>20 AMP DUPLEX GFCI</b>								
2097HGTRI	PT2097HGTRI	20	125	Ivory	5-20R	•	•	•
2097HGTRW	PT2097HGTRW	20	125	White	5-20R	•	•	•
2097HGTR		20	125	Brown	5-20R	•	•	•
2097HGTRBK	PT2097HGTRBK	20	125	Black	5-20R	•	•	•
2097HGTRGRY	PT2097HGTRGRY	20	125	Gray	5-20R	•	•	•
2097HGTRRED	PT2097HGTRRED	20	125	Red	5-20R	•	•	•
2097HGTRLA	PT2097HGTRLA	20	125	Light Almond	5-20R	•	•	•


All devices listed on this page conform to NEMA WD-1 and WD-6.

# WALL PLATES

## Custom Metal Wall Plates Special Configurations

### Chart B: Paint Finish Selection


These charts are for Custom Metal Wall Plates ONLY.  
For Devices & Wall Plates Color Selection Charts, see Pages A-29, B-87 and I-57.




PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX




PAINT COLOR  
PAINT SUFFIX




PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX




PAINT COLOR  
PAINT SUFFIX




PAINT COLOR  
PAINT SUFFIX




PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX



PAINT COLOR  
PAINT SUFFIX

Only available on Stainless Steel and Aluminum Plate Material. Colors may vary slightly.  
All Paint Finishes are gloss, except primer and flat black.

### Chart C: Metal Finish Selection



METAL FINISH  
US #3



METAL FINISH  
US #26



METAL FINISH  
US #10



METAL FINISH  
US #10

FINISH SUFFIX

CH

BC

BZ

\*Order with Brass Plate Material Prefix Only.  
For additional colors consult factory.