



ST120FN1-EMERGENCY ELECTRICAL DISCONNECT

Pilla Electrical Products, Inc.

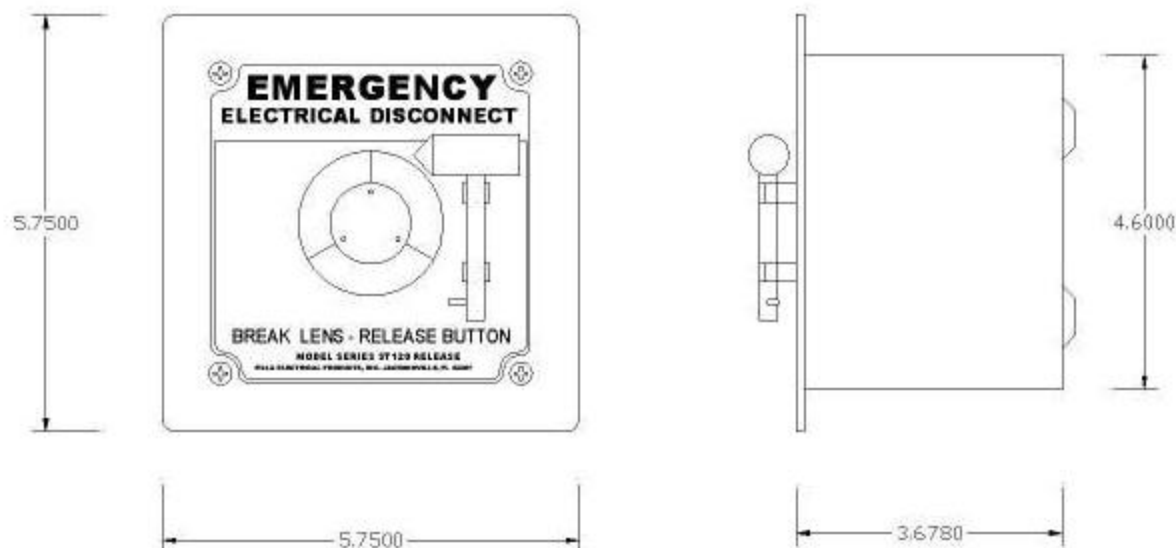

FLUSH MOUNT, NEMA1, ALL-METALL, 1/2-3/4" KNOCKOUT TOP, BOTTOM AND BACK, 1-6 CONTACT BLOCK CAPACITY

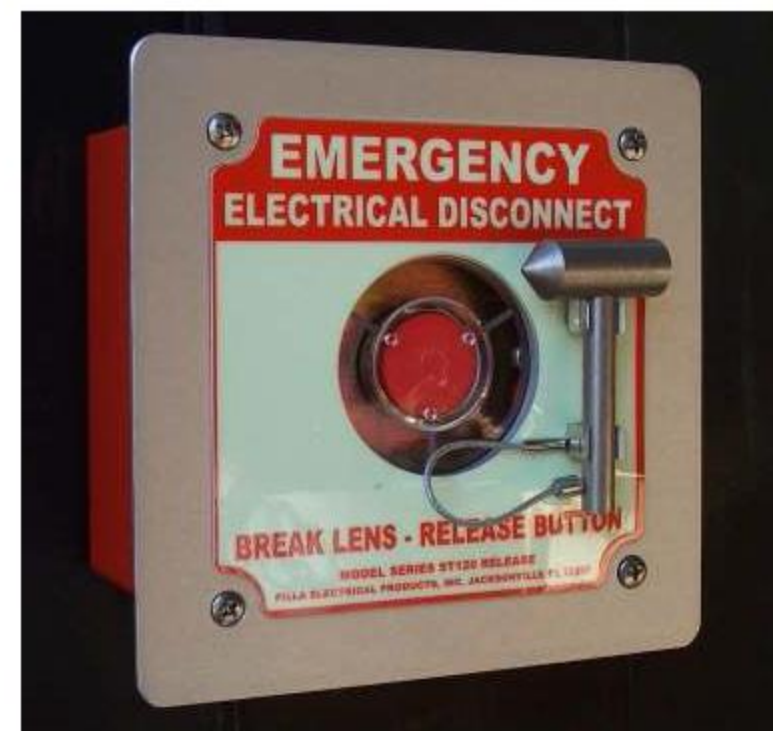

ST120FN1-EMERGENCY ELECTRICAL DISCONNECT



RATED OPERATIONAL CHARACTERISTICS CONFORMING TO EC/EN 60947-5-1	AC SUPPLY: UTILIZATION CATEGORY AC-15	STANDARD BLOCKS (SINGLE OR DOUBLE) WITH SCREW CLAMP TERMINALS: A600: Ue=600Vac AND Ie=1.2 A OR Ue=240 Vac AND Ie= 3 A OR Ue = 120 Vac AND Ie = 6 A CONTINUOUS THERMAL CURRENT 10 A	
	DC SUPPLY: UTILIZATION CATEGORY DC-13	STANDARD SINGLE OR DOUBLE BLOCKS WITH SCREW CLAMP TERMINALS: Q600: Ue= 600VdC AND Ie = 0.1 A	
		24 Vdc	0.5 A