


Product data sheet

Specifications

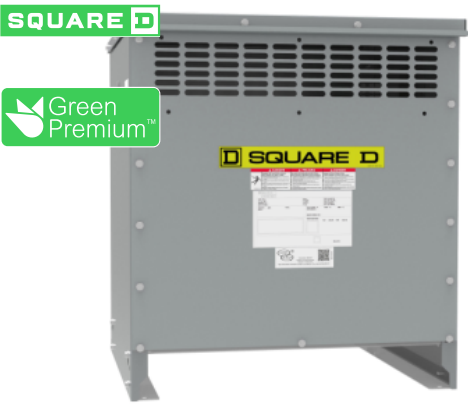

Low voltage transformer, DOE 2016, dry type, 3 phase, 30kVA, 480V pri, 208Y/120 sec, Al, 150C rise, Type 2

EXN30T3H

Product availability : Stock - Normally stocked in distribution facility

Price* : 3,056.00 USD

Main

Range of Product	Square D
Product or Component Type	DOE 2016 energy efficient transformer
Device short name	DOE 2016
Transformer type	Energy efficient
Device Application	Low voltage electrical distribution

Complementary

Box number	18M
Phase	3 phase
Rated operational power in VA	30 kVA
Network Frequency	60 Hz
Type of cooling	Natural convection
Primary Voltage	480 V delta
Number of tap-offs	2 2.5 % FCAN 4 2.5 % FCBN
Primary operational current	18.04 A 41.64 A 15 kVA
Secondary voltage	208Y/120 V
Coil Material	Aluminium
Basic IMP level (BIL)	10 kV
Temperature Rise	150 °C 220 °C insulated
DOE Efficiency	98.28 % at 35 % load factor , 167 °F (75.0 °C)
Sound Level	3 dB NEMA ST-20 39 dB
%IZ	3.80 %
%IX	1.58 %
X/R Ratio	0.49
Inrush current	668 A
Let Through Current	2.19 kA
Transformer Losses	80 no load (core loss)

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

	1044 load loss (coil loss)
Transformer BTU/HR	372 16.6 % 496 25 % 1164 50 % 2277 75 % 3835 100 %
Height	28.31 in (719 mm)
Depth	24.69 in (627 mm)
Width	25.51 in (648 mm)
Net Weight	303.00 lb(US) (137.44 kg)
Mounting support	Floor Floor, with 7400FMB Ceiling, with 7400CMB18M19M20M Wall, with 7400WMB18M19M20M
Degree of protection	UL type 2 UL type 3R, with 7400WS18M19M20M
Electrical connection	2 Hole Nema Pad primary 0.44 in (11.1 mm) 2 Hole Nema Pad secondary 0.44 in (11.1 mm) 4 Hole Nema Pad sec - XO 0.44 in (11.1 mm)
Number of mounting holes	0.51 in (13 mm)

Environment

Ambient air temperature for operation	104 °F (40 °C)
Average ambient air temperature for operation	30 °C
Standards	UL 1561 CSA C22.2 No 47 NEMA ST-20

Ordering and shipping details

Category	16256-3PH EXN/2016 15-150KVA LVGP XFMR
Discount Schedule	PE2X
GTIN	785901272540
Nbr. of units in pkg.	1
Package weight(Lbs)	321.99 lb(US) (146.05 kg)
Returnability	Yes
Country of origin	MX

Packing Units


Unit Type of Package 1	PCE
Package 1 Height	35.00 in (88.9 cm)
Package 1 width	32.00 in (81.28 cm)
Package 1 Length	29.75 in (75.565 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl Glycidyl Ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration

Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

Dimensions

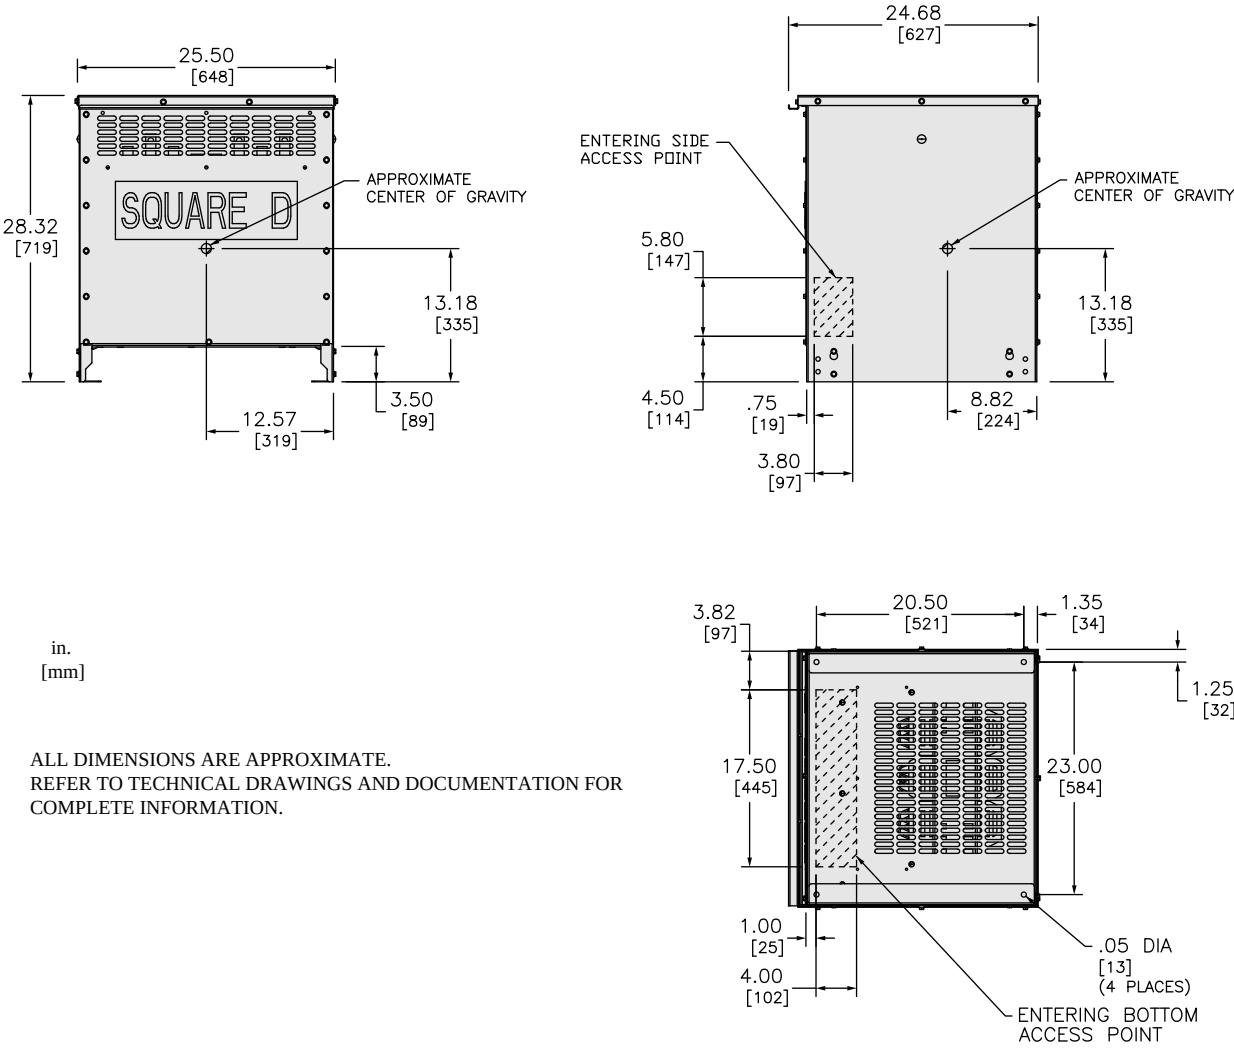

Wiring Diagram

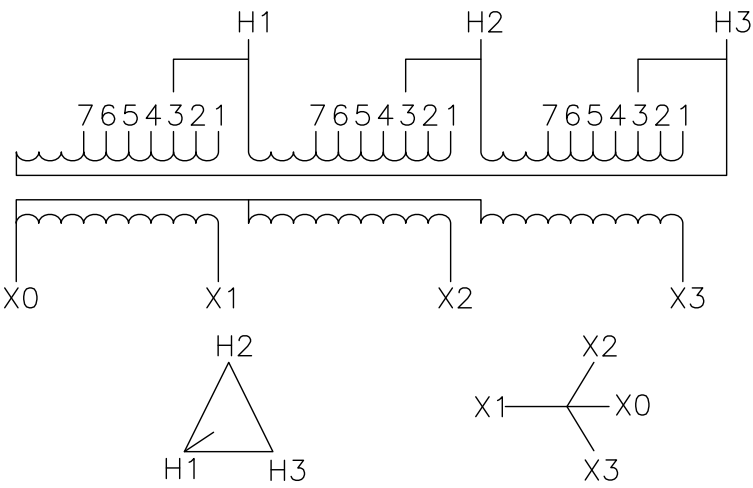

REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

IN EACH PHASE CONNECT TO TAPS	
PRIMARY VOLTS	2–2.5% FCAN 4–2.5% FCBN
504	1
492	2
480	3
468	4
456	5
444	6
432	7

NOTE: ACTUAL VOLTAGES & NAMEPLATE VALUES MAY NOT MATCH VOLTAGE IN TABLE